



CATENA FLEYER

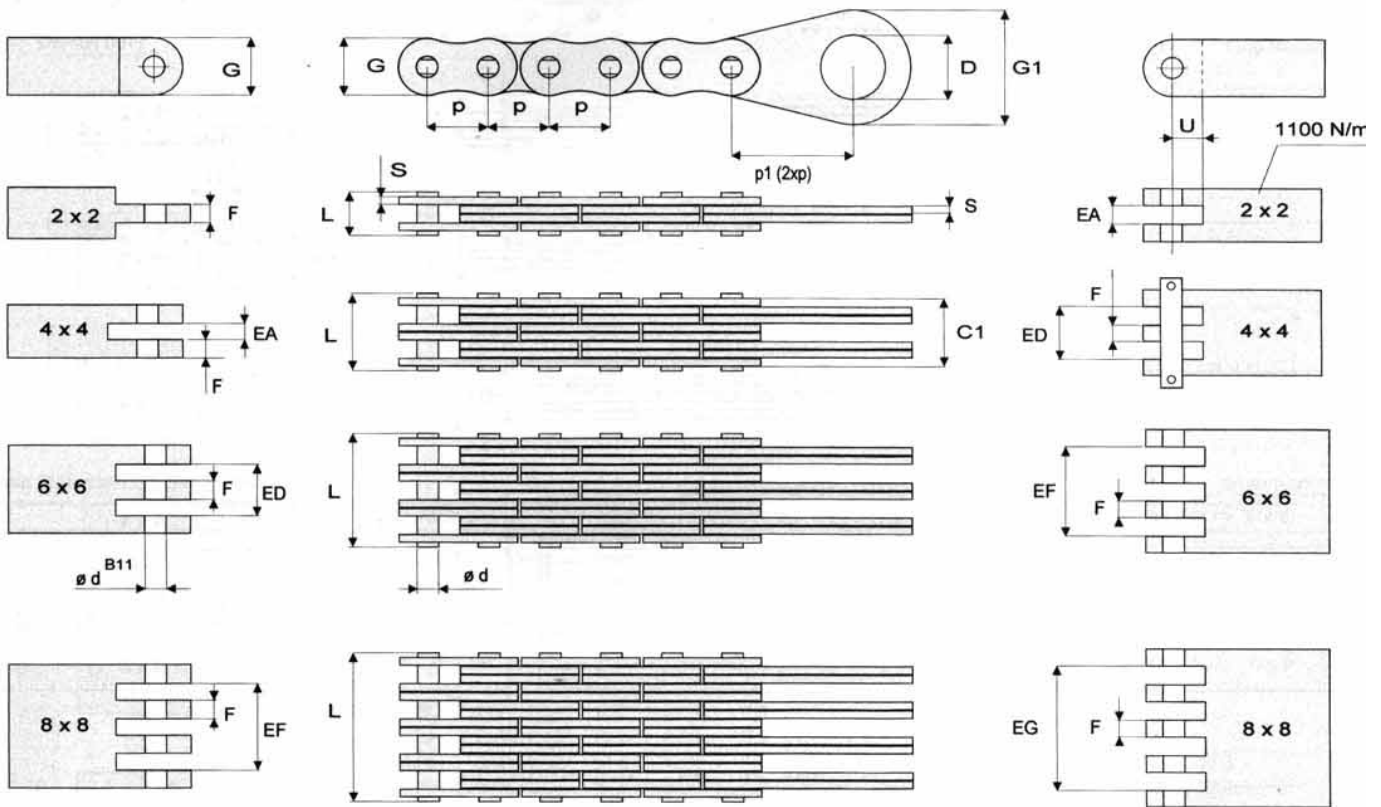

Le catene AS 12XX, 25XX, corrispondono alla Norma DIN 8152-1 Serie LL

dimensioni in mm

DIMENSIONI CATENA										piastra terminale			DIMENSIONI PETTINI							
passo p	altezza G	piastra S	perno d	100 passi (mm)	WERKNORM		larghezza L	# catena C1	carico rott FB (KN)	peso (Kg/m)	foro D	piastra G1	piastra S1	-0,2 U	+0,2 F	+0,2 EA	+0,2 ED	EF	EG	
9,525	8,7	1,04	3,28	944	922	2x2	6,2	4,4	10,7	0,23	10,0	18,0	1,00	5,5	2,2	2,2	-	-	-	
					944	4x4	10,4	8,8	21,0	0,51						2,2	6,6	-		
					966	6x6	14,9	13,2	33,1	0,66						2,2	6,6	11,0		
12,70	10,7	1,69	4,45	1259	LL0822	1222	2x2	8,9	7,0	22,5	0,44	12,0	22,0	1,65	7,5	3,5	3,5	-	-	-
					LL0844	1244	4x4	15,9	14,0	45,0	0,87						3,5	10,5	-	
					LL0866	1266	6x6	22,8	21,0	67,0	1,30						3,5	10,5	17,5	
					LL0888	1288	8x8	29,9	28,0	85,0	1,60						3,5	10,5	24,5	
15,875	12,7	1,94	5,08	1580		1522	2x2	10,1	8,0	29,0	0,55	16,0	28,0	1,90	9,5	4,0	4,0	-	-	-
						1544	4x4	18,1	16,0	62,5	1,13						4,0	12,0	-	
						1566	6x6	25,9	23,9	94,5	1,68						4,0	12,0	20,0	
						1588	8x8	34,0	32,0	115	2,15						4,0	12,0	28,0	
19,05	14,8	2,29	5,72	1891		1944	4x4	21,3	18,7	85,0	1,52	18,0	32,0	2,24	11,0	4,7	4,7	14,0	-	-
						1966	6x6	30,3	27,9	129	2,27						4,7	14,0	23,4	
						1988	8x8	40,0	37,3	140	2,50						4,7	14,0	32,7	
25,40	20,2	3,06	8,27	2532	LL1622	2522	2x2	15,5	12,5	78,0	1,42	25,0	44,0	3,00	13,5	6,3	6,3	-	-	-
					LL1644	2544	4x4	28,1	25,1	155	2,79						6,3	18,8	-	
					LL1666	2566	6x6	40,5	37,3	230	4,15						6,3	18,8	31,3	
					LL1688	2588	8x8	52,8	49,7	290	5,20						6,3	18,8	43,8	
31,75	22,8	4,16	10,17	3154		3144	4x4	37,9	34,3	215	4,06	25,0	44,0	4,00	17,0	8,6	8,6	25,7	-	-
						3166	6x6	55,0	51,4	320	6,04						8,6	25,7	42,9	
						3188	8x8	72,1	68,6	427	7,63						8,6	25,7	60,0	
38,10	30,7	5,55	14,63	3806		3844	4x4	49,1	45,1	362	7,57	32,0	56,0	2,5x2	22,0	11,3	11,3	33,8	-	-
						3866	6x6	71,6	67,7	550	11,0						11,3	33,8	56,4	
						3888	8x8	94,1	90,3	740	13,5						11,3	33,8	78,9	

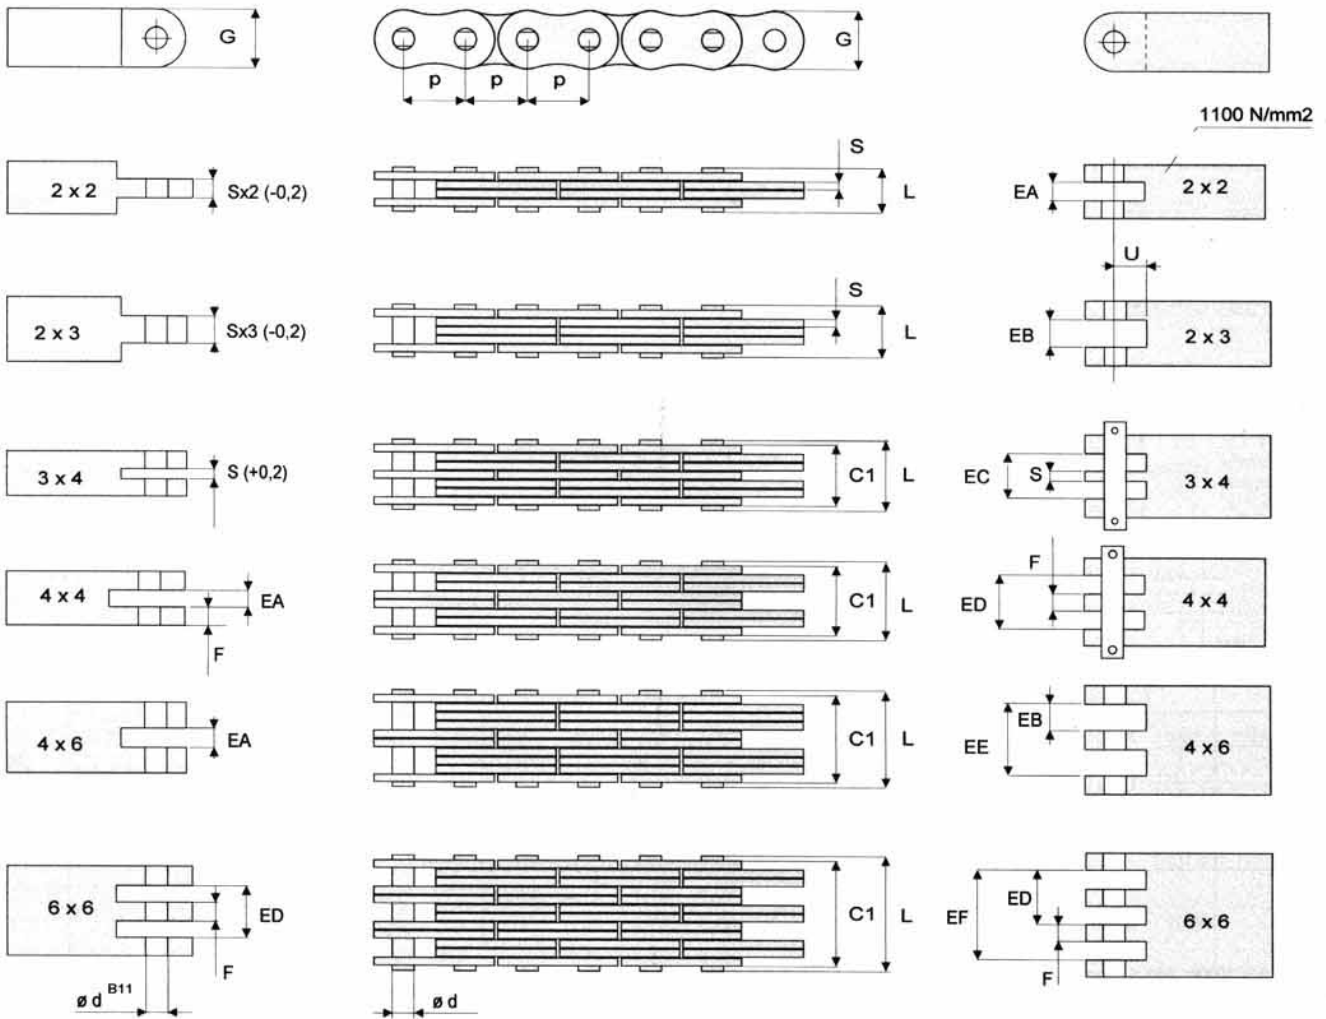

Serie LL DIN 8152-1 (ISO 4347)

dimensioni in mm

DIMENSIONI CATENA										piastra terminale			DIMENSIONI PETTINI					
passo	altezza	piastro	perno	100 passi	LL	larghezza	# catena	carico rott	peso	foro	piastro	piastro	-0,2	+0,2	+0,2	+0,2		
p	G	S	d	(mm)		L	C1	FB	(Kg/m)	D	G1	S1	U	F	EA	ED	EF	
12,70	10,7	1,69	4,45	1259	LL 0822	2x2	8,9	7,0	21,0	0,44	12,0	22,0	1,65	7,5	3,5	-	-	
					LL 0844	4x4	15,9	14,0	42,0	0,87						3,5	10,5	-
					LL 0866	6x6	22,8	21,0	64,0	1,30						3,5	10,5	17,5
15,875	12,8	1,55	5,08	1577	LL 1022	2x2	8,9	6,7	22,7	0,47	-	-	-	9,5	3,4	3,4	-	-
					LL 1044	4x4	15,6	13,4	45,4	0,92						3,4	10,0	-
					LL 1066	6x6	22,2	20,0	68,1	1,36						3,4	10,0	16,8
19,05	14,8	1,81	5,72	1892	LL 1222	2x2	10,0	7,6	32,0	0,62	-	-	-	11,0	3,8	3,8	-	-
					LL 1244	4x4	17,8	15,4	64,0	1,21						3,8	11,4	-
					LL 1266	6x6	24,8	22,4	96,0	1,79						3,8	11,4	19
25,40	20,2	3,06	8,27	2532	LL 1622	2x2	15,5	12,5	72,0	1,42	25,0	44,0	3,00	13,5	6,3	6,3	-	-
					LL 1644	4x4	28,1	25,1	144,0	2,79						6,3	18,8	-
					LL 1666	6x6	40,5	37,3	216,0	4,15						6,3	18,8	31,3
31,75	25,3	3,56	10,17	3157	LL 2022	2x2	18,2	14,9	95,0	2,03	-	-	-	17,0	7,5	7,5	-	-
					LL 2044	4x4	33,4	30,1	190,0	4,00						7,5	22,4	-
					LL 2066	6x6	47,9	44,3	285,0	5,96						7,5	22,4	37,3
38,10	30,7	5,08	14,63	3797	LL 2422	2x2	25,4	21,4	170,0	3,60	32,0	56,0	2,5x2	22,0	10,7	10,7	-	-
					LL 2444	4x4	46,8	42,8	340,0	7,07						10,7	32,1	-
					LL 2466	6x6	68,2	64,2	510,0	10,53						10,7	32,1	53,5

